

## AC230V-5050-16D-L126W49R5-21191

**Built-in LED modules with integrated driver for direct connection to mains voltage**

- Module with integrated electronics
- Economic one-piece solution
- Easy refitting of existing luminaires
- Ideal for ceiling-mounted and wallmounted luminaires
- Enables thin designs of luminaires

### Technical data

- Input voltage: 220–240 V, 50–60 Hz
- Power factor: > 0.9
- System efficacy of the module up to 140 lm/W
- High colour rendering index CRI > 70
- Colour accuracy initially: 5 SDCM
- On-board push-in terminals (WAGO 2060)
- Life-time of 50,000 hours
- 5-year guarantee

**50W@140Lm/w**




### Specific technical data

Type	Typ. luminous flux at tp = 25 °C	Typ. Colour temperature (CCT)	Colour rendering index CRI	AC voltage 50 - 60 Hz ( V )	Typ. power consumption at tp = 65 °C	Input current ( mA )	Efficacy of the module at tp = 65 °C
21191	6435Lm	3000K	>70	220 - 240V	49.5W	240mA	130Lm/w
21191	6930Lm	4000K	>70	220 - 240V	49.5W	240mA	140Lm/w
21191	6930Lm	5000K	>70	220 - 240V	49.5W	240mA	140Lm/w

Tolerance range for optical and electrical data: ±10 %.

### DIMENSIONS (All dimensions in mm)

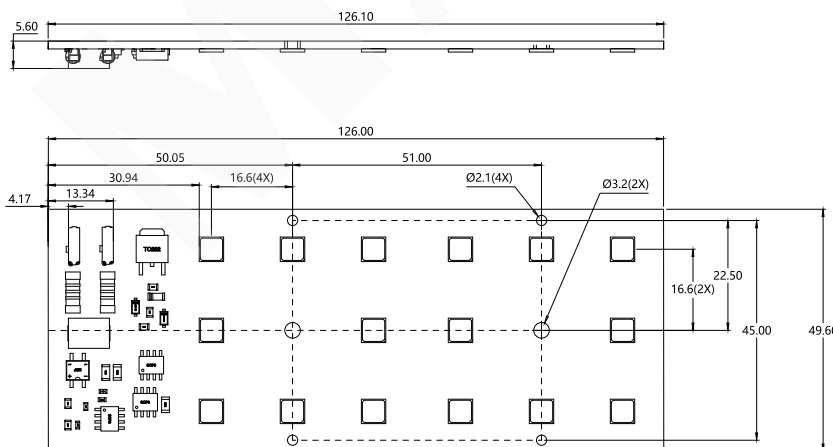

### Typical applications

- Installation in luminaires comerciales
- High bay lighting
- Flood and Area lighting
- Urban street lighting
- Road lighting

### Website

<http://www.led-module.cn/prol285>

