

MK286-144H-48S3P-144V-40W-L1119R5W20-21131


Built-in PCB lighting modules

The new MK286-72H-20731 is characterised by its particularly easy-to-use mounting and connection options (ZHAGA-compliant hole spacing). Thanks to producing a homogeneous light field without any discernible individual light points, these LED modules are ideal for use with reflectors in luminaires constructed for T5 and T8 lamps.

40W@201 Lm/w

Technical data

Dimensions: 1119.5 x 20 mm
 On-board push-in terminals (WAGO 2059)
 Allowed operating temperature at tc point:
 -40 to 85 °C (> 320 mA)
 -40 to 105 °C (320 mA)
 Use of external LED constant-current drivers
 Efficiency up to 201 lm/W
 Colour rendering index Ra: > 80
 Colour accuracy initially: 3 SDCM;
 after 70,000 hrs. operating time: 4 SDCM
 Lumen maintenance L80/B10:
 70,000 hrs. (If 320 mA)

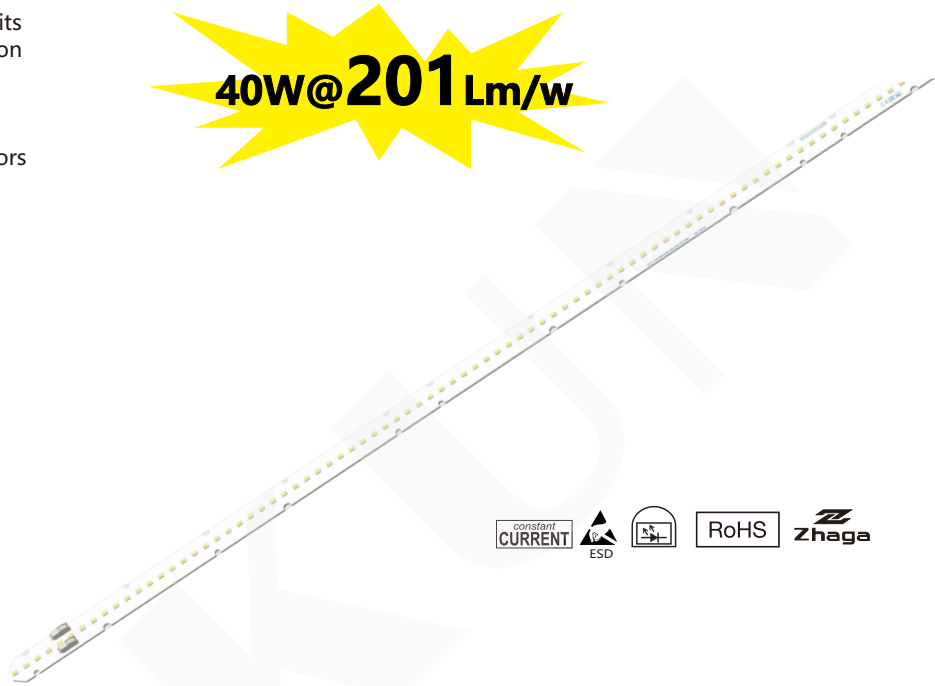

Specific technical data


Type	Typ. luminous flux at tp = 25 °C	Typ. luminous flux at tp = 65 °C	Typ. Colour temperature (CCT)	Colour rendering index CRI	Min. forward voltage at tp = 65 °C	Max. forward voltage at tp = 25 °C	Typ. forward current	Typ. power consumption at tp = 65 °C	Max. forward current	Efficacy of the module at tp = 25 °C	Efficacy of the module at tp = 65 °C
------	----------------------------------	----------------------------------	-------------------------------	----------------------------	------------------------------------	------------------------------------	----------------------	--------------------------------------	----------------------	--------------------------------------	--------------------------------------

Linear-Z LED-module – L1119.5 W20 H8

40W-21131LN	8,241Lm	7,954Lm	4,000K	>80	129.6V	148.8V	320mA	41.8W	480mA	201Lm/W	194Lm/W
	5,796Lm	5,600Lm					220mA	28.2W		207Lm/W	200Lm/W
	3,195Lm	3,090Lm					120mA	15.2W		213Lm/W	206Lm/W
40W-21131RK	7,280Lm	7,000Lm	4,000K	>80	129.6V	148.8V	310mA	40.6W	480mA	182Lm/W	175Lm/W
	5,076Lm	4,887Lm					210mA	27.2W		188Lm/W	181Lm/W
	2,730Lm	2,632Lm					110mA	14.02W		195Lm/W	188Lm/W

Emission data at tp = 65 °C | * Colour tolerance: 3 MacAdam | ** Production tolerance of luminous flux and efficiency: ±10 % | Min. CRI Ra: > 80

DIMENSIONS (All dimensions in mm)

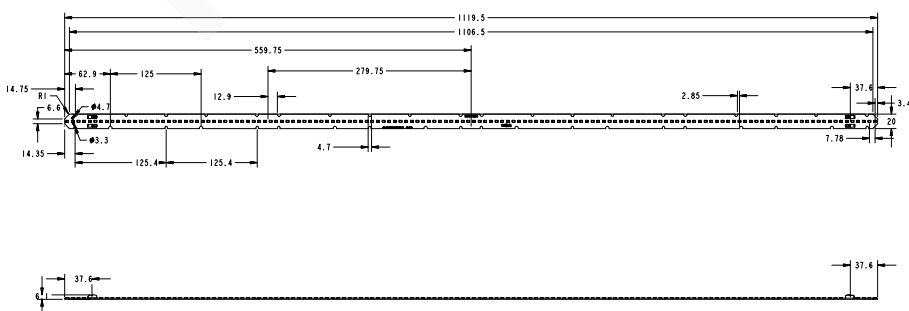

Typical applications

- Installation in luminaires comerciais
- Office lighting
- Retail, corridor and shelf lighting
- T5/T8 replacement as built-in module
- Furniture lighting
- Backlighting for advertising

Website

<http://www.led-module.cn/prol283>

